
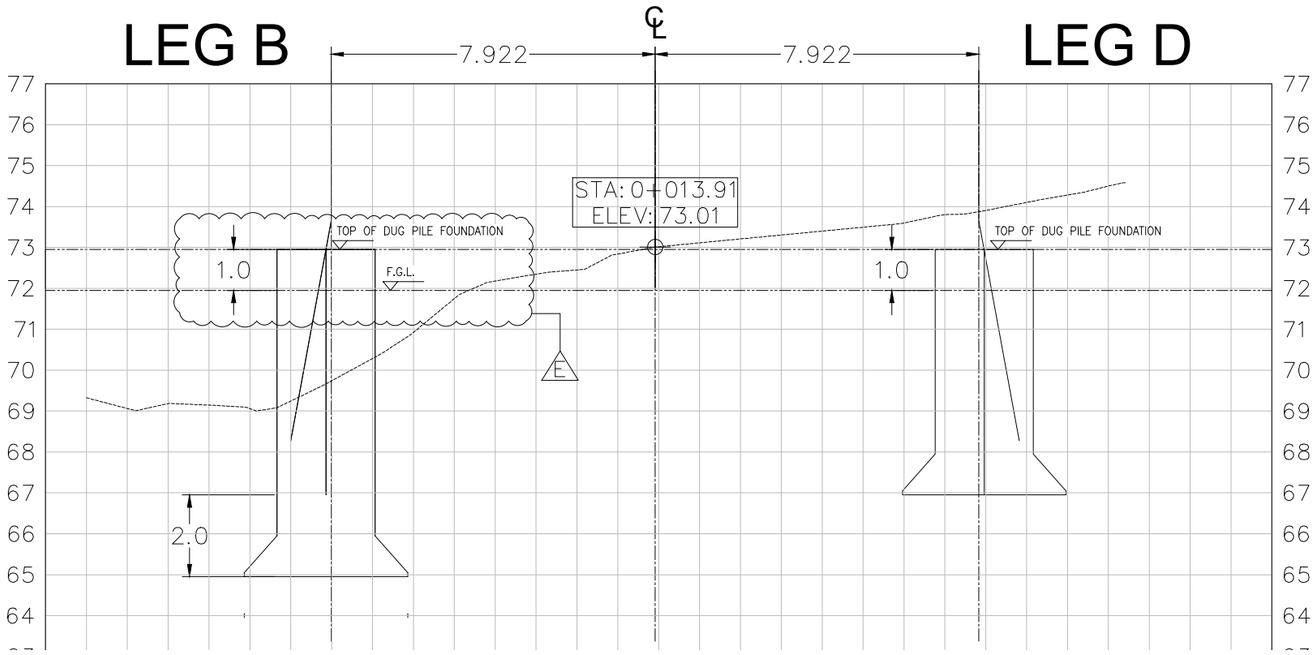


Section A-A

SCALE NTS

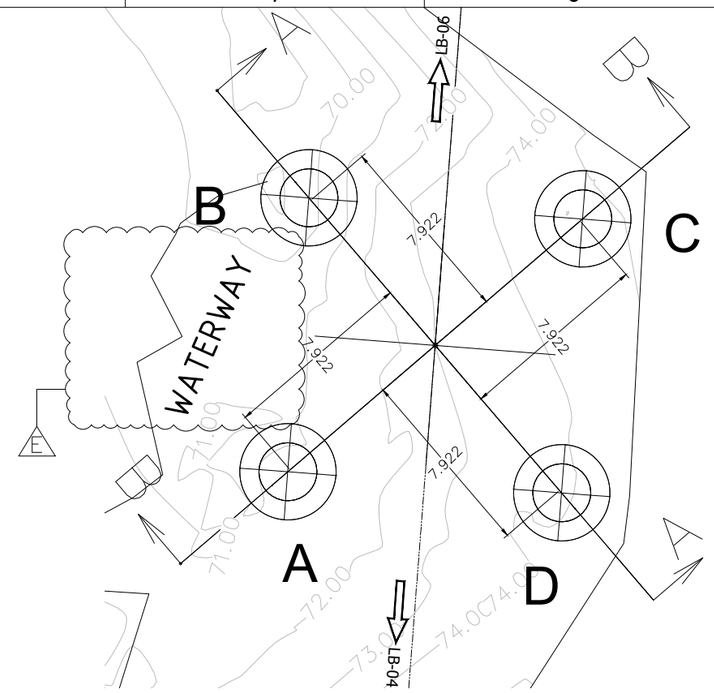


Plan View

SCALE NTS


NOTES:

1. REFER TO 0518-LA-8500-N-020-B FOR THE PLAN & PROFILE OF THE PROPOSED LEG EXTENSIONS FOR DU2 TOWER.

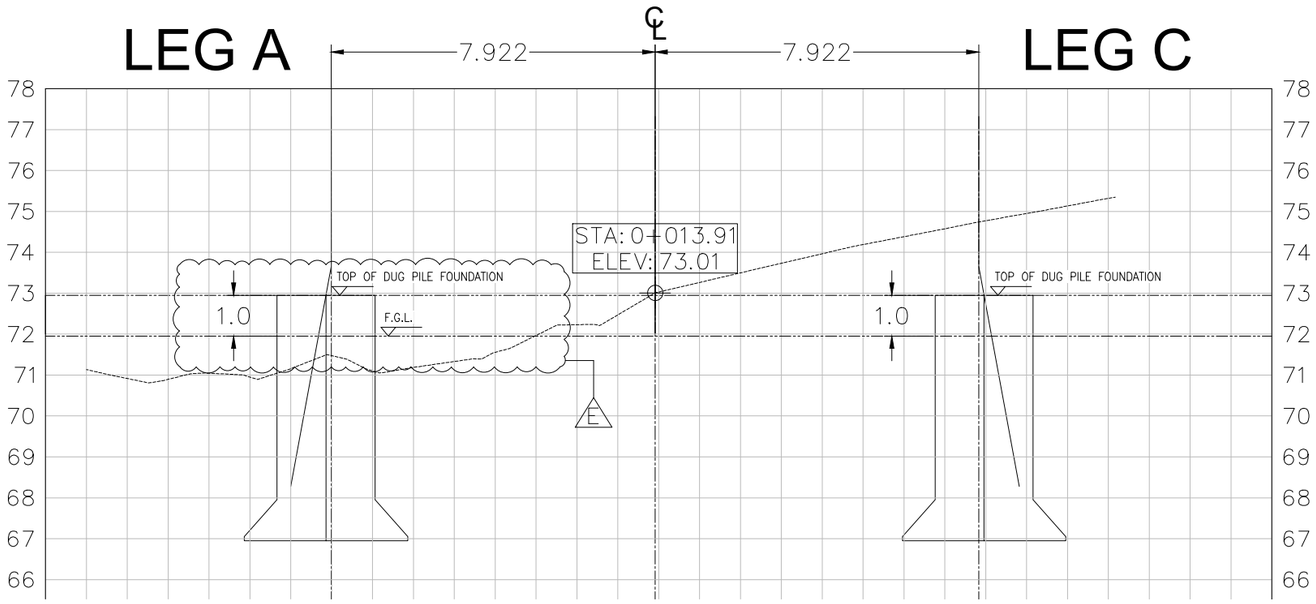


Section B-B

SCALE NTS

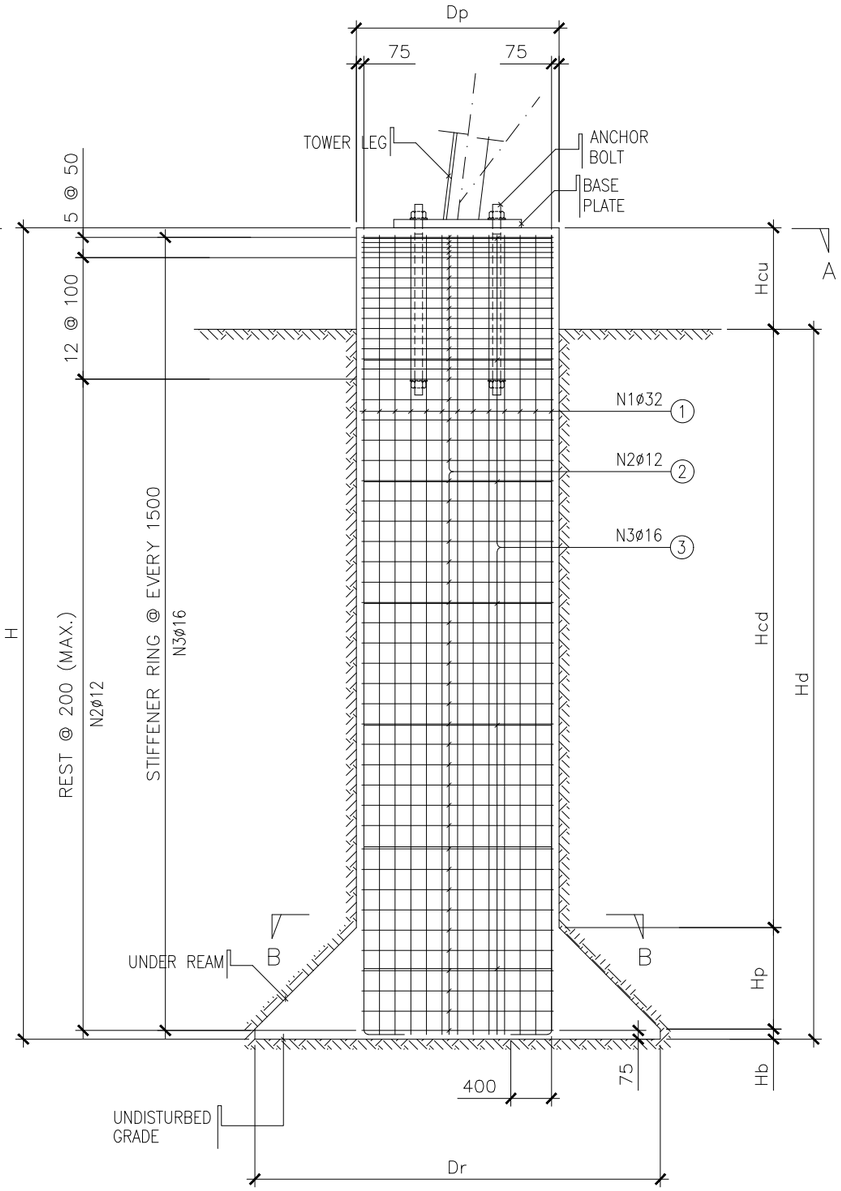


VERTICAL SECTION

N T S

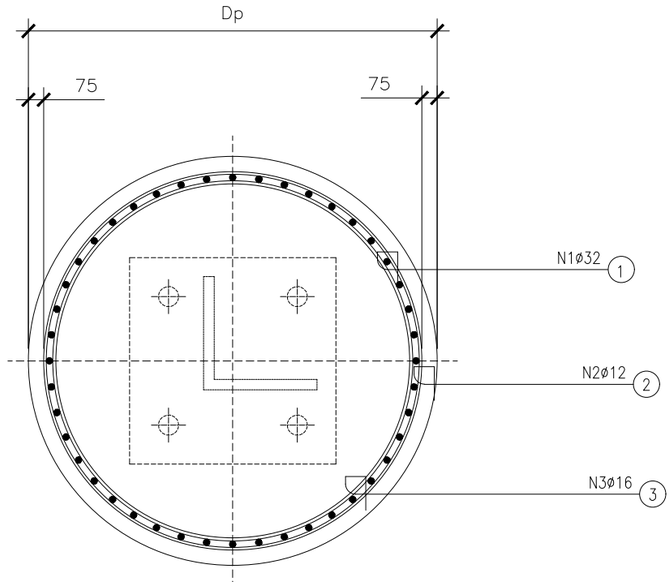

SECTION A - A

N T S

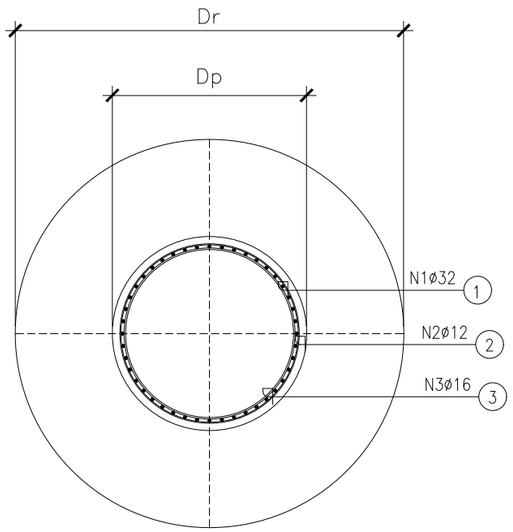


SECTION B - B

N T S

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE INDICATED.
2. CONCRETE COMPRESSIVE STRENGTH IN 28 DAYS = 211 kg/cm^2
3. STEEL REINFORCEMENT: DEFORMED BARS CONFORMING TO ASTM A615 GR. 60
4. QUANTITIES OF REINFORCEMENT BARS IN THE DRAWINGS ARE INDICATIVE ONLY. FOUNDATION SCHEDULE GOVERNS.
5. COVER TO MAIN REINFORCEMENT (OUTERMOST REINFORCEMENT) = 75 mm
6. LAP SPLICE FOR MAIN BARS SHALL BE THE MINIMUM OF:
   a. D20 AND SMALLER = 44 x NOMINAL DIAMETER
   b. D25 AND LARGER = 54 x NOMINAL DIAMETER
7. MAIN VERTICAL BARS MAY BE BUNDLED BY 2, 3 OR 4 IF REQUIRED FOR EFFICIENT PLACEMENT OF CONCRETE. DEVELOPMENT LENGTH IN NOTE 6 SHALL BE INCREASED BY 20% AND 33% FOR 3-BAR BUNDLE AND 4-BAR BUNDLE. RESPECTIVELY. MINIMUM CLEAR SPACING 75mm.
8. ALL REINFORCEMENT BARS SHALL BE SECURELY SUPPORTED IN ITS CORRECT POSITION DURING CONCRETING BY APPROVED BAR CHAIRS, SPACER OR SUPPORT BARS.
9. STUB SETTING SHALL BE ALIGNED WITH THE TOWER LEG, REFER TO THE RELEVANT TOWER & STUB ERECTION DRAWING.

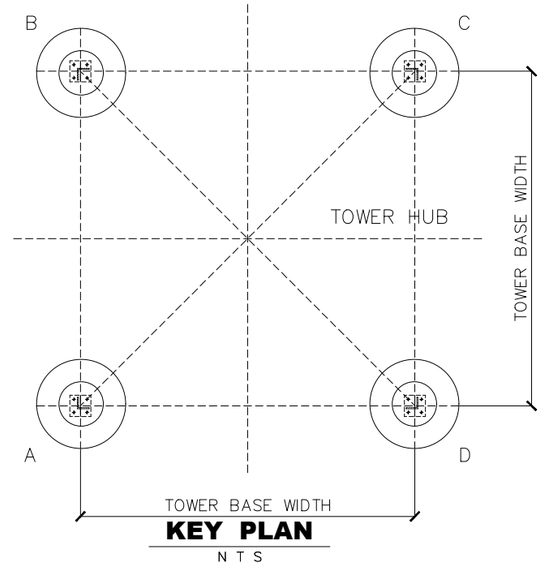

KEY PLAN

N T S


SCHEDULE OF FOUNDATION / MATERIAL LIST

LOCATION/ TOWER NO.	TOWER TYPE	DIMENSIONS (MM) Dp	Dr	H	Hd	Hcu	Hcd	Hp	Hb	EXCAVATION (m^3)	CONCRETE (m^3)
LB-05 LEG A,C,&D	"DR2st"	2400	4000	6000	5000	1000	4000	900	100	80.22	93.80

REINFORCEMENT


NO.	SIZE	QTY	SKETCH & DIMENSION	LENGTH(mm)	WEIGHT(kg)	TOTAL WEIGHT(kg)
1	ø32	N1=60	5850, 400	6250	7102.14	
*2	ø12	N2=40	2250, 100	7169	763.92	8029.19
3	ø16	N3=5	2162, 100	6892	163.14	

*2 5 @ 50mm, 12 @ 100mm, REST @ 200mm (MAX.)

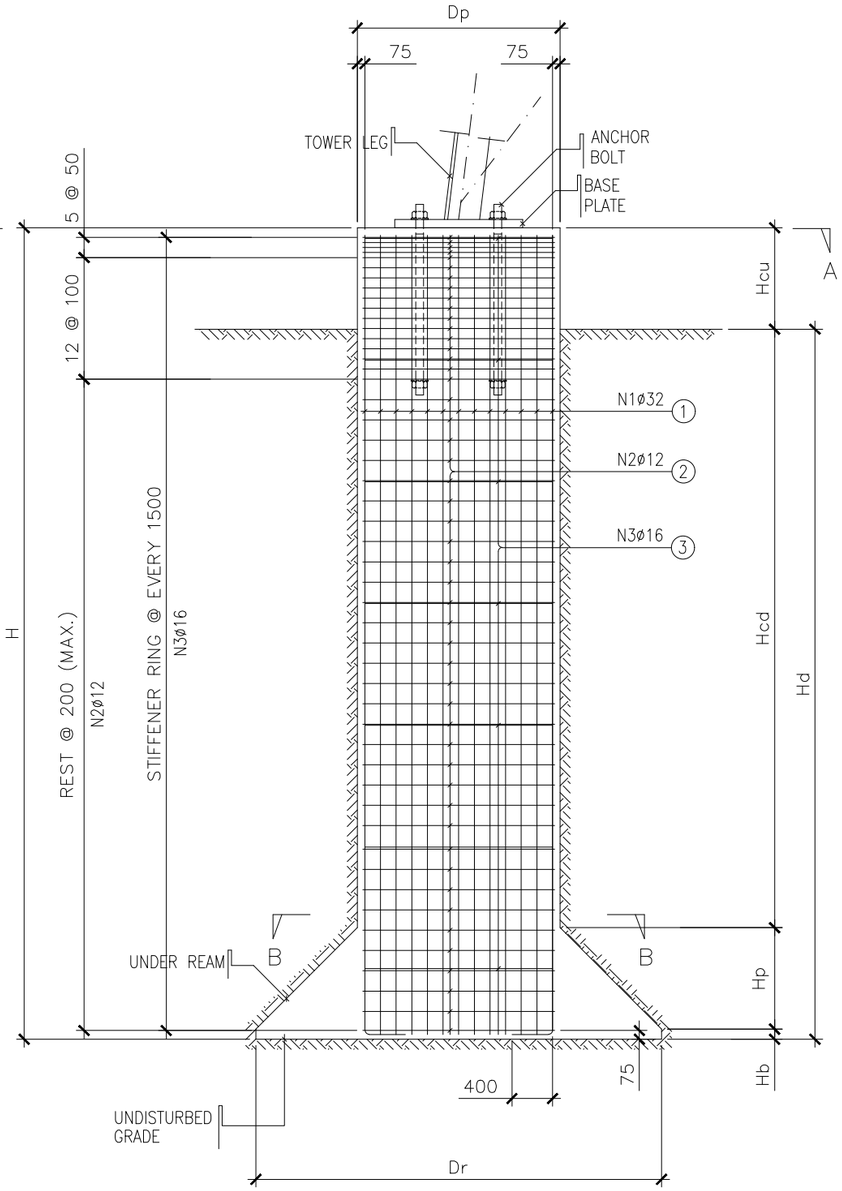


VERTICAL SECTION

N T S

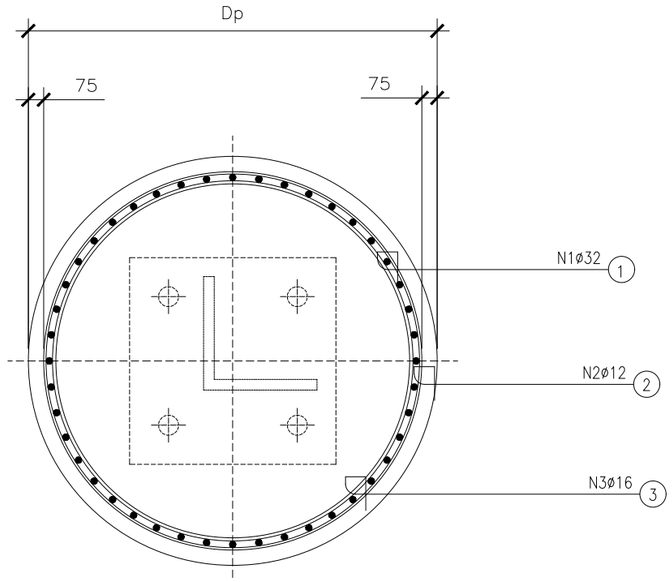

SECTION A - A

N T S

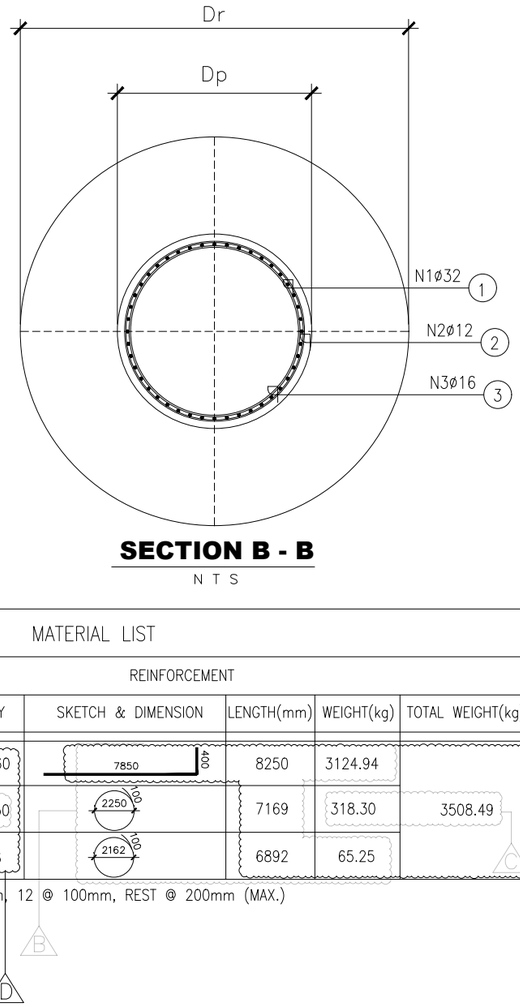


SECTION B - B

N T S

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE INDICATED.
2. CONCRETE COMPRESSIVE STRENGTH IN 28 DAYS = 211 kg/cm^2
3. STEEL REINFORCEMENT: DEFORMED BARS CONFORMING TO ASTM A615 GR. 60
4. QUANTITIES OF REINFORCEMENT BARS IN THE DRAWINGS ARE INDICATIVE ONLY. FOUNDATION SCHEDULE GOVERNS.
5. COVER TO MAIN REINFORCEMENT (OUTERMOST REINFORCEMENT) = 75 mm
6. LAP SPLICE FOR MAIN BARS SHALL BE THE MINIMUM OF:
   a. D20 AND SMALLER = 44 x NOMINAL DIAMETER
   b. D25 AND LARGER = 54 x NOMINAL DIAMETER
7. MAIN VERTICAL BARS MAY BE BUNDLED BY 2, 3 OR 4 IF REQUIRED FOR EFFICIENT PLACEMENT OF CONCRETE. DEVELOPMENT LENGTH IN NOTE 6 SHALL BE INCREASED BY 20% AND 33% FOR 3-BAR BUNDLE AND 4-BAR BUNDLE. RESPECTIVELY. MINIMUM CLEAR SPACING 75mm.
8. ALL REINFORCEMENT BARS SHALL BE SECURELY SUPPORTED IN ITS CORRECT POSITION DURING CONCRETING BY APPROVED BAR CHAIRS, SPACER OR SUPPORT BARS.
9. STUB SETTING SHALL BE ALIGNED WITH THE TOWER LEG, REFER TO THE RELEVANT TOWER & STUB ERECTION DRAWING.

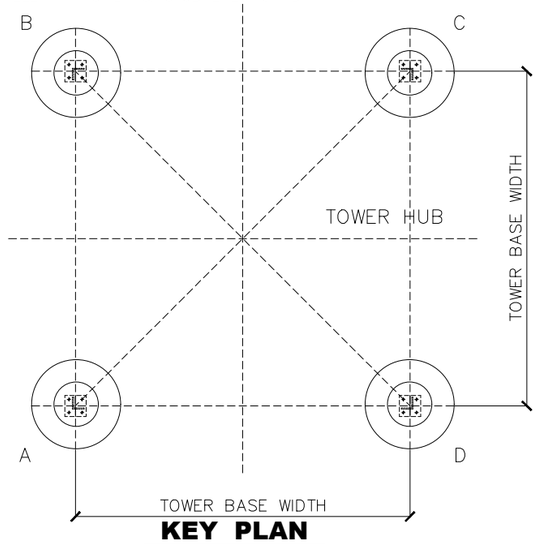

KEY PLAN

N T S

SCHEDULE OF FOUNDATION

LOCATION/ TOWER NO.	TOWER TYPE/LEG	DIMENSIONS (MM)								EXCAVATION (m^3)	CONCRETE (m^3)
		Dp	Dr	H	Hd	Hcu	Hcd	Hp	Hb		
LB-05 LEG B	"DR2st"	2400	4000	8000	7000	1000	6000	900	100	35.79	40.31

MATERIAL LIST

NO.	SIZE	QTY	SKETCH & DIMENSION	LENGTH(mm)	WEIGHT(kg)	TOTAL WEIGHT(kg)
1	ø32	N1=60	7850, 400	8250	3124.94	
*2	ø12	N2=50	2250, 100	7169	318.30	3508.49
3	ø16	N3=6	2162, 100	6892	65.25	

*2 5 @ 50mm, 12 @ 100mm, REST @ 200mm (MAX.)