



Z

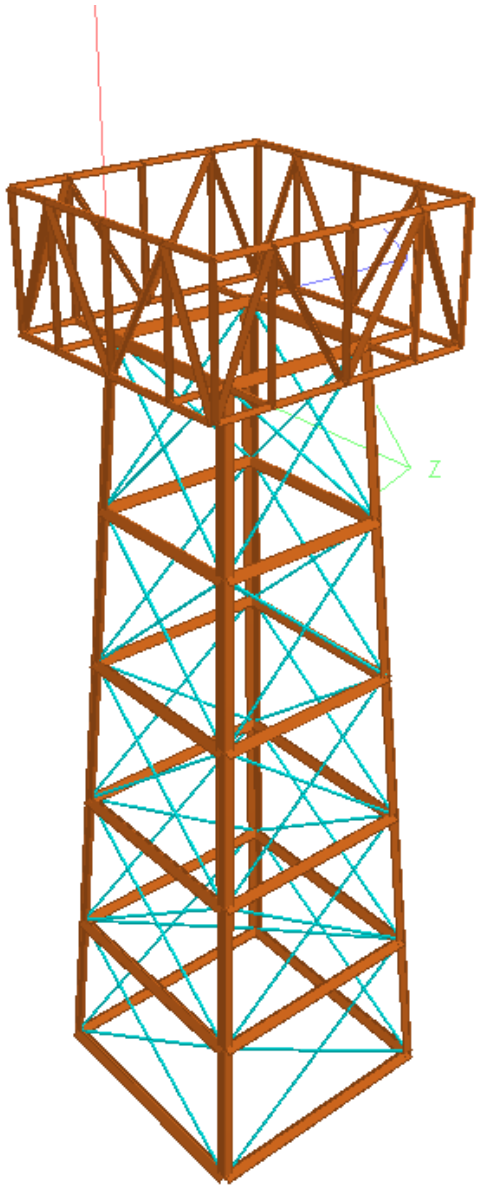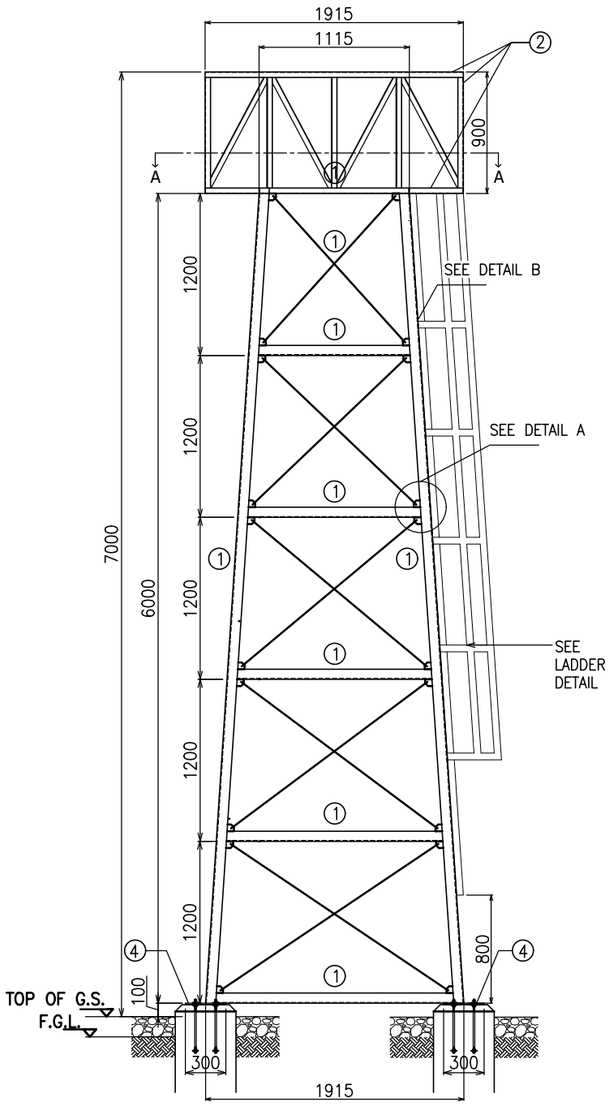


A ELEVATION VIEW

SCALE 1:45

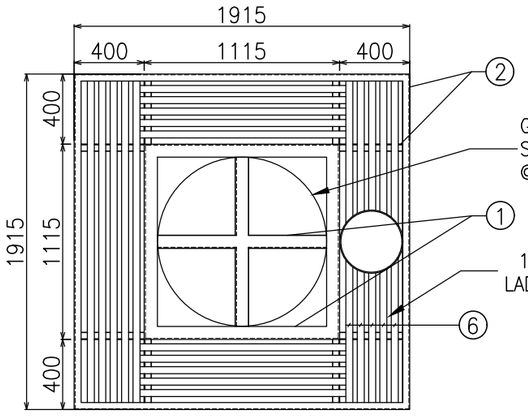

B SECTION A-A

SCALE 1:45

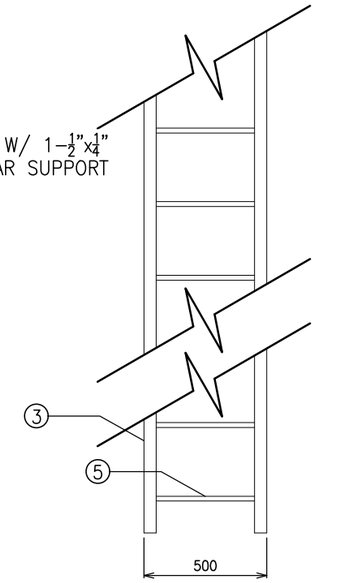


D DETAIL B

SCALE 1:25

NOTES:


1. ALL DIMENSIONS ARE IN MILLIMETER UNLESS OTHERWISE INDICATED.
2. MINIMUM COMPRESSIVE STRENGTH OF CONCRETE SHALL BE Fc=20.70 Mpa at 28 DAY PERIOD.
3. ALL REINFORCING STEEL BARS SHALL CONFORM TO THE REQUIREMENTS OF PNS: 49/2001 FOR DEFORMEND STEEL BARS, GRADE 275.
4. DETAILS OF REINFORCING BARS (SPLICES, BENDS, HOOKS, ETC.) SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF ACI CODE.
5. ALL STRUCTURAL STEEL SHALL CONFORM TO ASTM A36 AND SHALL HAVE A MINIMUM YIELD STRESS, FY=248.20 MPa.
6. THE NET ALLOWABLE SOIL BEARING CAPACITY USED IS 98.17 kPa AT MINIMUM FOUNDING LEVEL OF 1.00M.
7. ALL STRUCTURAL STEEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE LATEST AISC SPECIFICATIONS AND CODE OF STANDARD PRACTICE.
8. BOLTS SHALL CONFORM TO ASTM A–307 UNLESS OTHERWISE INDICATED.
9. WELDS ON ALL GUSSET PLATES AND CONNECTIONS SHALL BE FILLET WELD ALL AROUND.
10. WELDING SHALL CONFORM TO E60 SERIES OF THE SPECIFICATIONS FOR MILD STEEL ARC WELDING ELECTRODES ASTM A233.
11. ALL GUSSET PLATES SHALL BE 10 MM THICK.
12. ALL ASPECTS OF CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE PROVISION OF ACI CODE.
13. DEGREE OF COMPACTION OF BACKFILL SHALL BE 90% OF RELATIVE DENSITY.

LEGENDS	
MARK	SIZES
1	L 3"X3"X¼"
2	L 1 ½"X1 ½"X3/16"
3	ø2" G.I. PIPE
4	PLATE 12"X12"X½"
5	ø1" G.I. PIPE
6	1 ½"X¼" FLAT BAR

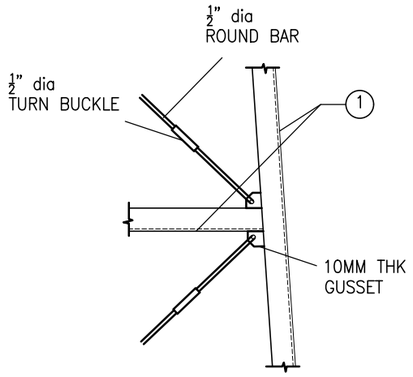


C DETAIL A

SCALE 1:20

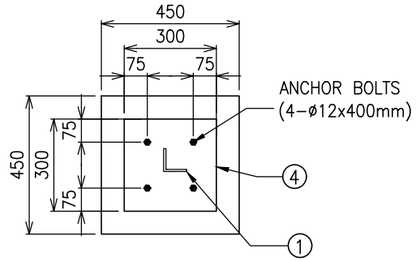


G BASEPLATE DETAIL

SCALE 1:20

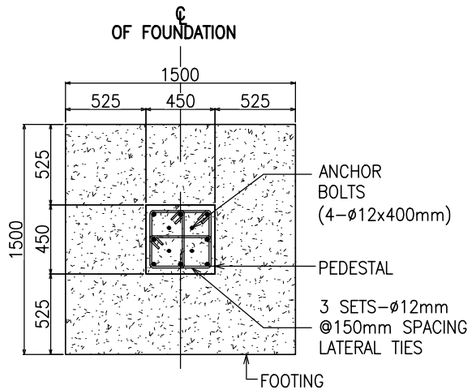


E FOUNDATION PLAN

SCALE 1:30

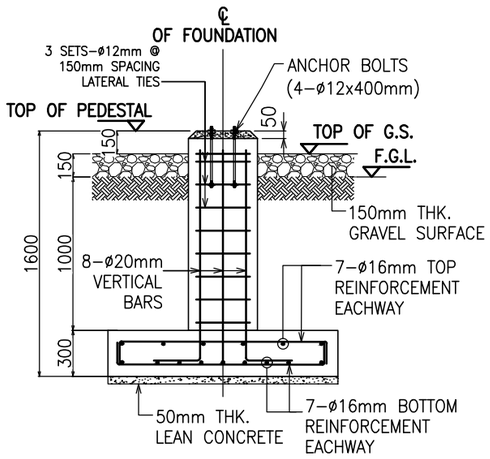

F TYPICAL FOUNDATION DETAILS

SCALE 1:30

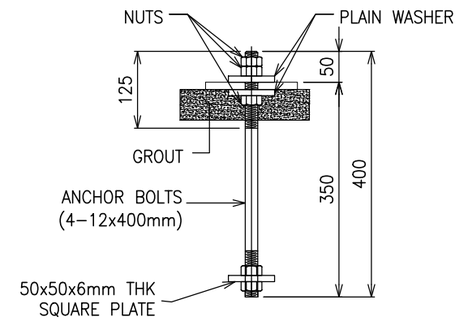

H ANCHOR BOLT DETAIL

SCALE 1:20