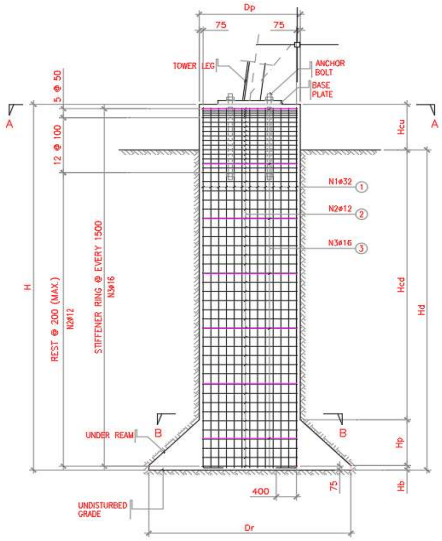


SCHEDULE OF FOUNDATION / **MATERIAL LIST**

LOCATION/ TOWER NO.	TOWER TYPE	DIMENSIONS (MM) Dp	Dr	H	Hd	Hcu	Hcd	Hp	Hb	EXCAVATION (m³)	CONCRETE (m³)	REINFORCEMENT NO.	SIZE	QTY	SKETCH & DIMENSION	LENGTH(mm)	WEIGHT(kg)	TOTAL WEIGHT(kg)
NB-04	"DT1ten15-Z1-138"	1800	3800	8400	7400	1000	6300	1000	100	94.34	104.52	1	ø32	N1=40	8450	8650	8,737.19	9,942.18
												*2	ø12	N2=52	1650	5284	975.98	
												3	ø16	N3=7	1618	5183	229.01	

SCHEDULE OF FOUNDATION / **MATERIAL LIST**


LOCATION/ TOWER NO.	TOWER TYPE	DIMENSIONS (MM) Dp	Dr	H	Hd	Hcu	Hcd	Hp	Hb	EXCAVATION (m³)	CONCRETE (m³)	REINFORCEMENT NO.	SIZE	QTY	SKETCH & DIMENSION	LENGTH(mm)	WEIGHT(kg)	TOTAL WEIGHT(kg)
NB-05	"DT1ten15-Z1-138"	1800	3800	8600	7600	1000	6500	1000	100	96.38	106.55	1	ø32	N1=40	8450	8850	8,939.21	10,162.96
												*2	ø12	N2=53	1650	5284	994.74	
												3	ø16	N3=7	1618	5183	229.01	

SCHEDULE OF FOUNDATION / **MATERIAL LIST**

LOCATION/ TOWER NO.	TOWER TYPE	DIMENSIONS (MM) Dp	Dr	H	Hd	Hcu	Hcd	Hp	Hb	EXCAVATION (m³)	CONCRETE (m³)	REINFORCEMENT NO.	SIZE	QTY	SKETCH & DIMENSION	LENGTH(mm)	WEIGHT(kg)	TOTAL WEIGHT(kg)
NB-03	"DU2"	2000	4000	8600	7600	1000	6500	1000	100	116.03	128.60	1	ø32	N1=46	8450	8850	10,280.09	11,649.81
												*2	ø12	N2=53	1650	5912	1,112.97	
												3	ø16	N3=7	1618	5811	256.75	

*2 5 @ 50mm, 12 @ 100mm, REST @ 200mm (MAX.)

12	0.888
16	1.578
20	2.466
25	3.853
32	6.313



Frustum of cone (of volume V)

OR $V = \frac{\pi h}{3}(R^2 + Rr + r^2)$

Tower No.	Tower Type	Dimension Dp	Dr	H	Hd	Hcu	Hcd	Hp	Hb	Per Leg Excavation cu.m.	Concrete cu.m.	Rebar kg	Per Tower Excavation cu.m.	Concrete cu.m.	Rebar kg
LA-01	DU2	2	4	8	7	1	5.9	1	0.1	27.12	30.26	3,128.29	108.49	121.06	12,513.15
LA-02	DU2	2	4	8	7	1	5.9	1	0.1	27.12	30.26	3,128.29	108.49	121.06	12,513.15
LA-11	DU2 (Leg A,B,D)	2.4	4	8.5	6.5	2	5.4	1	0.1	33.90	42.94	3,396.42	101.69	128.83	10,189.27
	DU2 (Leg C)	2.4	4	9.6	6.1	3.5	5	1	0.1	32.09	47.92	3,814.12	32.09	47.92	3,814.12
LA-15	DU2	2	4	8	7	1	5.9	1	0.1	27.12	30.26	3,128.29	108.49	121.06	12,513.15
LA-16	DR2st	2.4	4	7.5	6.5	1	5.4	1	0.1	33.90	38.42	3,306.37	135.58	153.68	13,225.48
LA-19	DU2	2	4	8	7	1	5.9	1	0.1	27.12	30.26	3,128.29	108.49	121.06	12,513.15
													703.31	**814.65**	**77,281.45**
												Contract	**709.00**	**796.00**	**76,878.00**
												Difference	- 5.69	18.65	403.45
												Unit Cost	1,950.00	14,200.00	120.00
													- 11,086.47	264,867.97	48,414.58
															302,196.09 **Under Run**
													1,382,550.00	11,303,200.00	9,225,360.00

N1 Dia	Qty	L	Weight	N2 Dia	Qty	L	Weight	N3 Dia	Qty	L	Weight	
32		m	kg	12		m	kg	16		m	kg	
6.313	54	8.250	2,812.44	0.888	50	5.912	262.49	1.578	6	5.635	53.35	
6.313	54	8.250	2,812.44	0.888	50	5.912	262.49	1.578	6	5.635	53.35	
6.313	54	8.750	2,982.89	0.888	53	7.169	337.40	1.578	7	6.892	76.13	3,396.42
6.313	54	9.850	3,357.88	0.888	58	7.169	369.23	1.578	8	6.892	87.00	3,814.12
6.313	54	8.250	2,812.44	0.888	50	5.912	262.49	1.578	6	5.635	53.35	
6.313	60	7.750	2,935.55	0.888	48	7.169	305.57	1.578	6	6.892	65.25	
6.313	54	8.250	2,812.44	0.888	50	5.912	262.49	1.578	6	5.635	53.35	
			11,249.77				1,049.97				213.41	
			11,249.77				1,049.97				213.41	
			11,249.77				1,049.97				213.41	

3.14
0.137 0.16
0.16
0.16