


1 C-08 **SECTION A-A**

SCALE 1:100

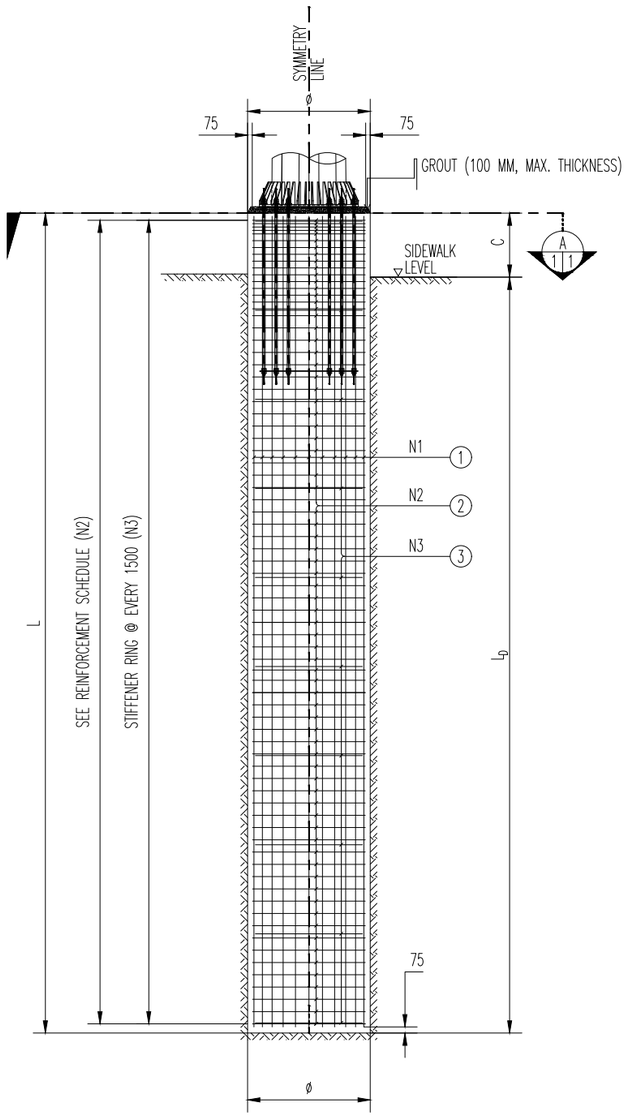

2 C-08 **BORED PILE ELEVATION**

SCALE 1:100

FOUNDATION SCHEDULE

POLE SITE	POLE TYPE	BOREHOLE	STRUCTURE DIMENSION				STRUCTURE REINFORCEMENT		QUANTITY ESTIMATE			
			ø (m)	L_D (m)	C (m)	L (m)	N1	N2	CONCRETE (m^3)	EXCAVATION (m^3)	REBAR (kg)	NON-SHRINK GROUT (m^3)
CL-6	SPQ	BH-5	1.60	5.90	1.00	6.90	26 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 11 @ 100mm, REST @ 150mm	13.87	11.86	1362	0.201
CL-7	SPQ	BH-6	1.60	6.20	1.00	7.20	26 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 18 @ 100mm, REST @ 150mm	14.48	12.47	1427	0.201
CL-8	SPQ	BH-7	1.60	6.80	1.00	7.80	26 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 25 @ 100mm, REST @ 150mm	15.68	13.67	1560	0.201
CL-9	SPQ	BH-8	1.60	6.70	1.00	7.70	27 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 13 @ 100mm, REST @ 150mm	15.48	13.47	1572	0.201
CL-15	SPQ	BH-16	1.60	7.30	1.00	8.30	27 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 12 @ 100mm, REST @ 150mm	16.69	14.68	1690	0.201
CL-16	SPQ	BH-17	1.60	7.30	1.00	8.30	28 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 11 @ 100mm, REST @ 150mm	16.69	14.68	1738	0.201
CL-17	SPQ	BH-18	1.60	6.40	2.00	8.40	28 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 22 @ 100mm, REST @ 150mm	16.89	12.87	1775	0.201
CL-18	SPQ	BH-19	1.60	6.90	2.00	8.90	28 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 23 @ 100mm, REST @ 150mm	17.90	13.87	1875	0.201
CL-19	SPQ	BH-21	1.60	5.90	1.00	6.90	26 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 8 @ 100mm, REST @ 150mm	13.87	11.86	1358	0.201
CL-20	SPQ	BH-22	1.60	7.40	2.00	9.40	29 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 27 @ 100mm, REST @ 150mm	18.90	14.88	2045	0.201
CL-29	SPQ	BH-33	1.60	7.20	2.00	9.20	28 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 32 @ 100mm, REST @ 150mm	18.50	14.48	1955	0.201
CL-30	SPQ	BH-34	1.60	7.70	1.00	8.70	28 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 12 @ 100mm, REST @ 150mm	17.49	15.48	1820	0.201
CL-31	SPQ	BH-35	1.60	7.00	3.00	10.00	30 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, REST @ 100mm	20.11	14.07	2330	0.201
CL-32	SPQ	BH-36	1.60	6.90	3.00	9.90	30 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 43 @ 100mm, REST @ 125mm	19.91	13.87	2263	0.201
CL-33	SPQ	BH-38	1.60	7.90	3.00	10.90	31 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, 45 @ 100mm, REST @ 150mm	21.92	15.88	2530	0.201
CL-34	SPQ	BH-39	1.60	7.70	3.00	10.70	30 PCS. ø32mm	ø12mm BAR TOP 2 @ 50mm, REST @ 150mm	21.51	15.48	2400	0.201

*N3 ø16mm BAR SPACED @ 1500mm

NOTES:

1. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE INDICATED.
2. CONCRETE COMPRESSIVE STRENGTH IN 28 DAYS = 20.70 MPa.
3. STEEL REINFORCEMENT: DEFORMED BARS CONFORMING TO ASTM A615 GR. 60.
4. QUANTITIES OF REINFORCEMENT BARS IN THE DRAWINGS ARE INDICATIVE ONLY. FOUNDATION SCHEDULE GOVERNS.
5. GROUT MIX RATIO OF ONE (1) PART CEMENT TO TWO (2) PARTS SAND.
6. COVER TO MAIN REINFORCEMENT (OUTERMOST REINFORCEMENT) = 75 mm.
7. USE BUNDLE BARS IF CLEAR SPACING OF REINFORCING BARS IS LESS THAN 75 mm (MAXIMUM OF FOUR BARS PER BUNDLE).
8. LAP SPLICE FOR MAIN BARS SHALL NOT BE LESS THAN 44 x NOMINAL DIAMETER (FOR 4-BAR BUNDLE SHOULD BE 1.33Ld).
9. ALL REINFORCEMENT BARS SHALL BE SECURELY SUPPORTED IN ITS CORRECT POSITION DURING CONCRETING BY APPROVED BAR CHAIRS, SPACER OR SUPPORT BARS.
10. FOR POLE FOUNDATION TEMPLATE AND ANCHOR BOLTS LAYOUT AND DIMENSION, REFER TO SLWI-8510-S-001-A POLE MANUFACTURER'S DRAWING.